


Container 40' ISO loaded with 32 Japan pallets via DPA Duisburg

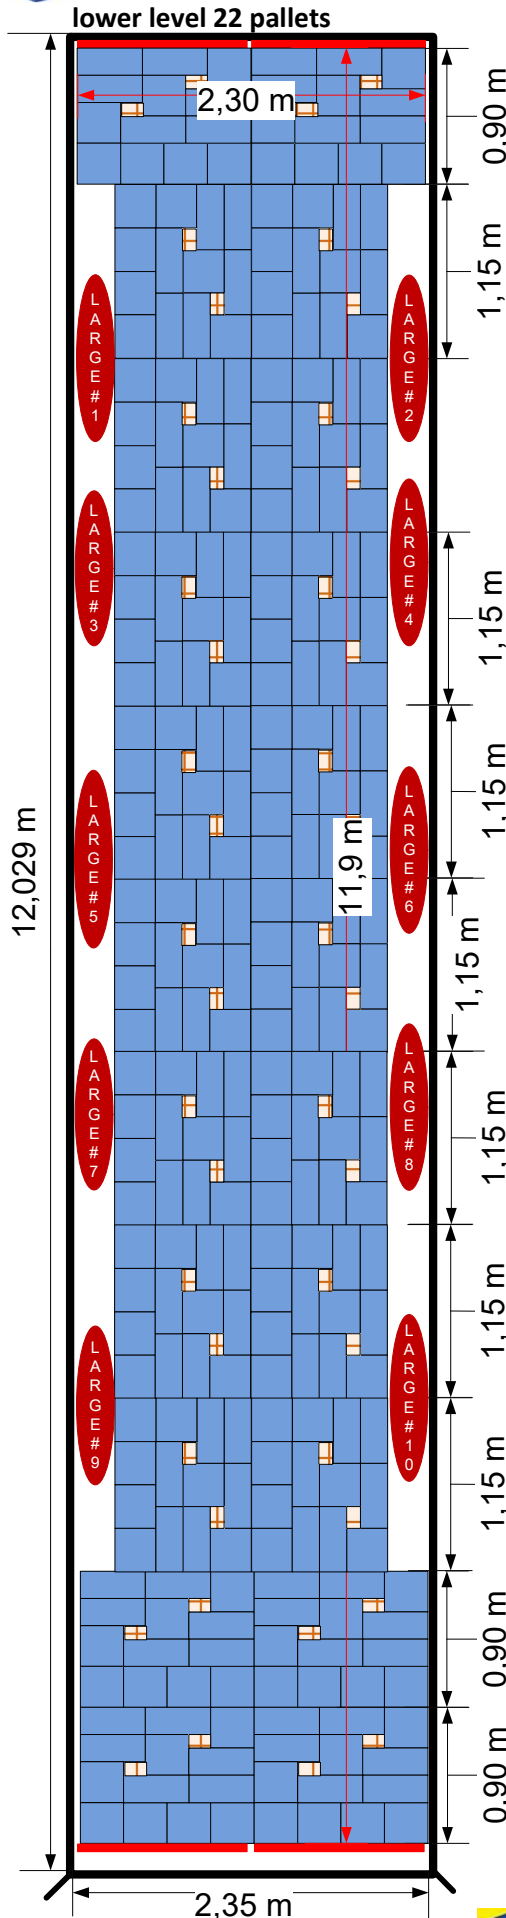

loading in container 40 ft. Standard
(inside 12 029 mm x 2350 mm)
With total **32** Japan pallets 1150 x 900 mm,
max. 640 kg each
(for Article RB 35377 + RB 39084)

For protection purposes each pallet is
equipped by dispatch plant with
1 integrated carton interlayer (Art. 32502)

tie-down 2 particle boards (2200x1033x10 mm)
have to be positioned at the front wall



Last row - small airbags at upper level (4x)



2 particle boards (2200 x 1033 x 10 mm) have
to be placed adjacent to loaded goods



picture sealed (bolt seal)



**Accessories for tie-down additionally
provided by crossdocking partner**

- 10x Airbag large (900 x 1850 mm) vertically
 - 21x Airbag small (900 x 1200 mm) horizontally
 - 3x particle board large (2200 x 1033 x 10 mm)
 - 22x particle board small (1080 x 860 x 10 mm)
- to be positioned on each pallet at lower level

upper level 10 pallets

