


Container 40' ISO loaded with 35 Japan pallets via DPA Duisburg

lower level 20 pallets

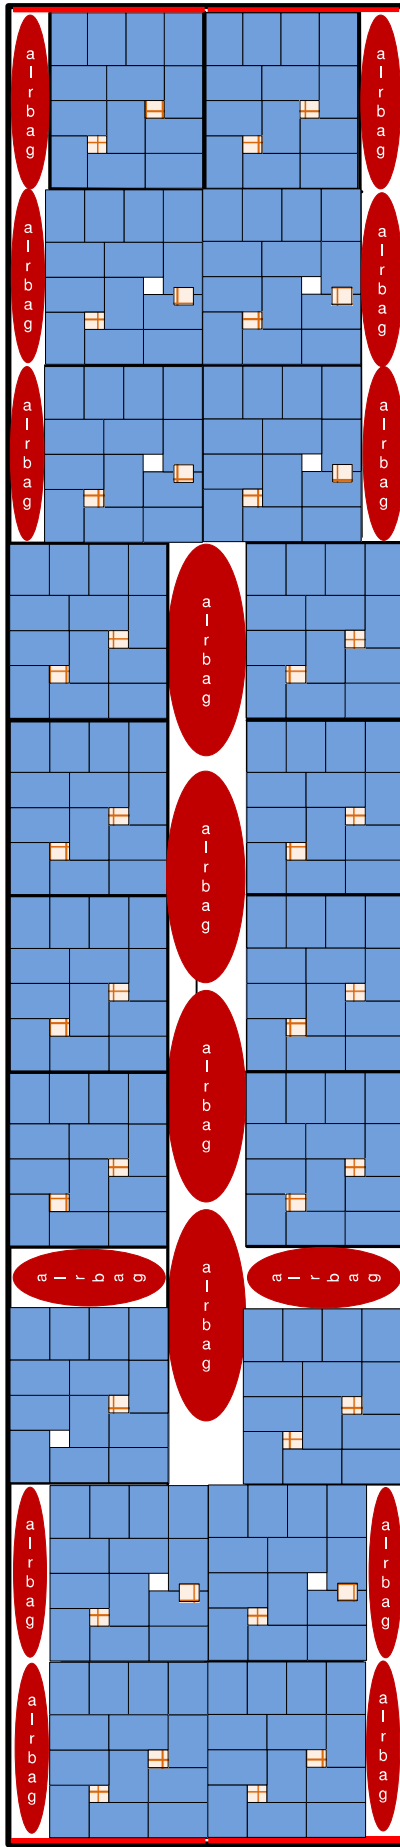

loading with

total 35 Japan pallets 1150 x 900 mm,

For protection purposes each pallet is equipped by dispatch plant with
1 integrated carton interlayer (Art. 32502)

tie-down

2 particle boards
(2200 x 1033 x 10 mm)
have to be positioned at
the front wall of container



The airbag (900 x 1850 mm)
for the middle blocking



2 large and 2 small airbags



The airbag (900 x 1850mm)
to be applied about 30 cm
above loading platform



To protect goods against damage at the container doors
2 particle boards (2200 x 1033 x 10 mm) have to be placed
adjacent to loaded goods and afterwards.



picture sealed (bolt seal)



Accessories for tie-down additionally provided by crossdocking partner

- 16x Airbag large (900 x 1850 mm)
 - 10x Airbag small (900 x 1200 mm)
 - 4x particle board large (2200 x 1033 x 10 mm)
 - 20x particle board small (1080 x 860 x 10 mm)
- to be positioned on each pallet at lower level

upper level 15 pallets

