



Container 40' ISO loaded with 39 Japan pallets via DPA Duisburg

lower level 20 pallets

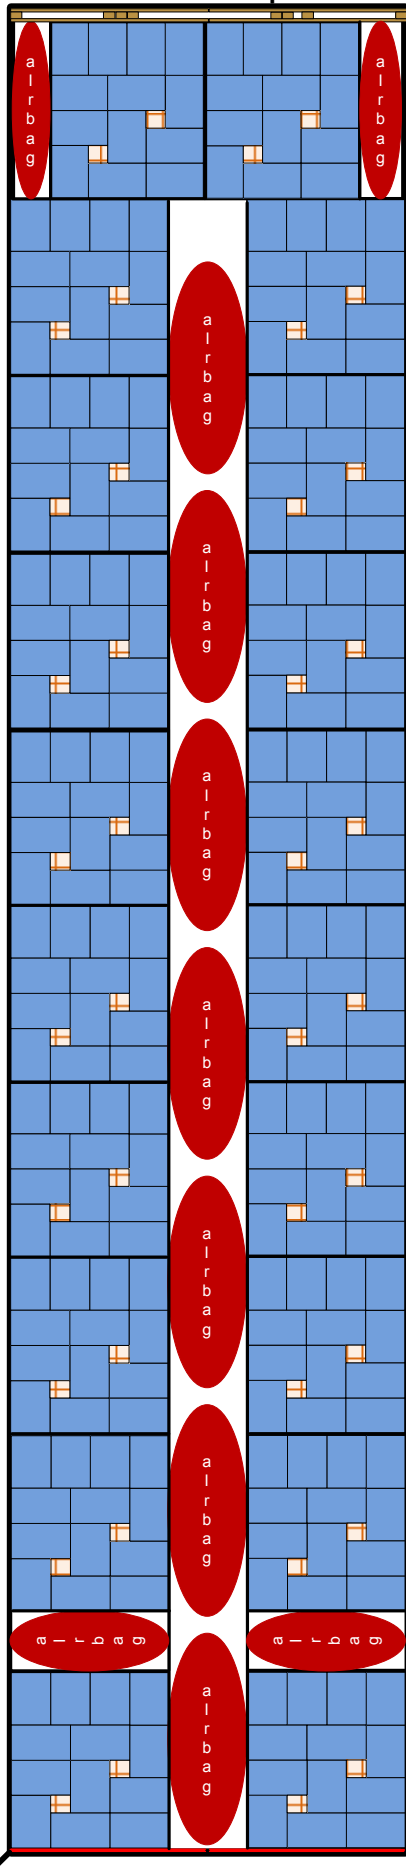

upper level 19 pallets

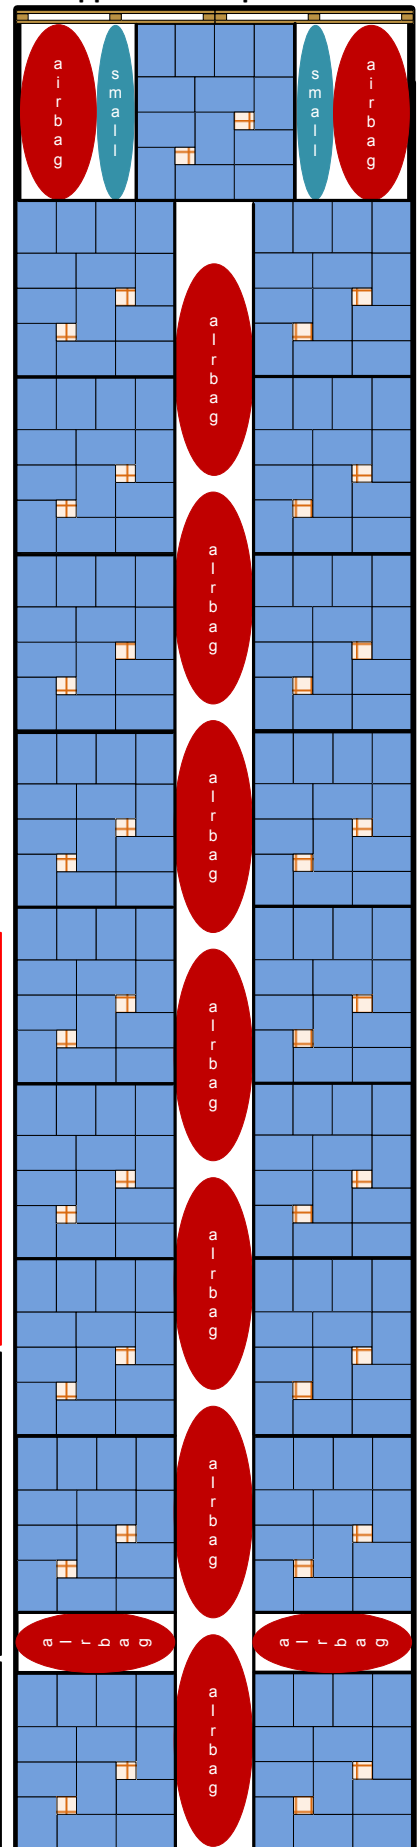

loading with

total **39 Japan pallets** 1150 x 900 mm, max. 640 kg each
(for Article RB 35377 + RB 39084)


For protection purposes each pallet is equipped by
dispatch plant with
1 integrated carton interlayer (Art. 32502) and
1 integrated particle board (Art. 32345)

tie-down

4 pallets (heat-treated) have to be positioned at
the front wall of container



The airbags (1000 x 1850 mm) have to be applied about
30 cm above loading platform



To protect goods against damage at the container doors
2 particle boards (2200 x 1150 mm) have to be placed
adjacent to loaded goods and afterwards
2 styrofoam profiles have to be fixed between
particle boards and container doors..



picture sealed (bolt seal)



Accessories for tie-down additionally provided by dispatch plant

Art. 15249 Japan pallet (heat-treated)	4x
Art. 32396 Airbag large (1000 x 1850 mm)	11x
Art. 32706 Airbag small (1000 x 1200 mm)	2x
Art. 32346 particle board large (2200 x 1150 mm)	2x
Art. 32402 styrofoam profile (1000 x 100 x 55 mm)	4x