Berger Logistik GmbH

Container 40' ISO loaded with 45 Japan pallets via DPA Duisburg

lower level 24 pallets

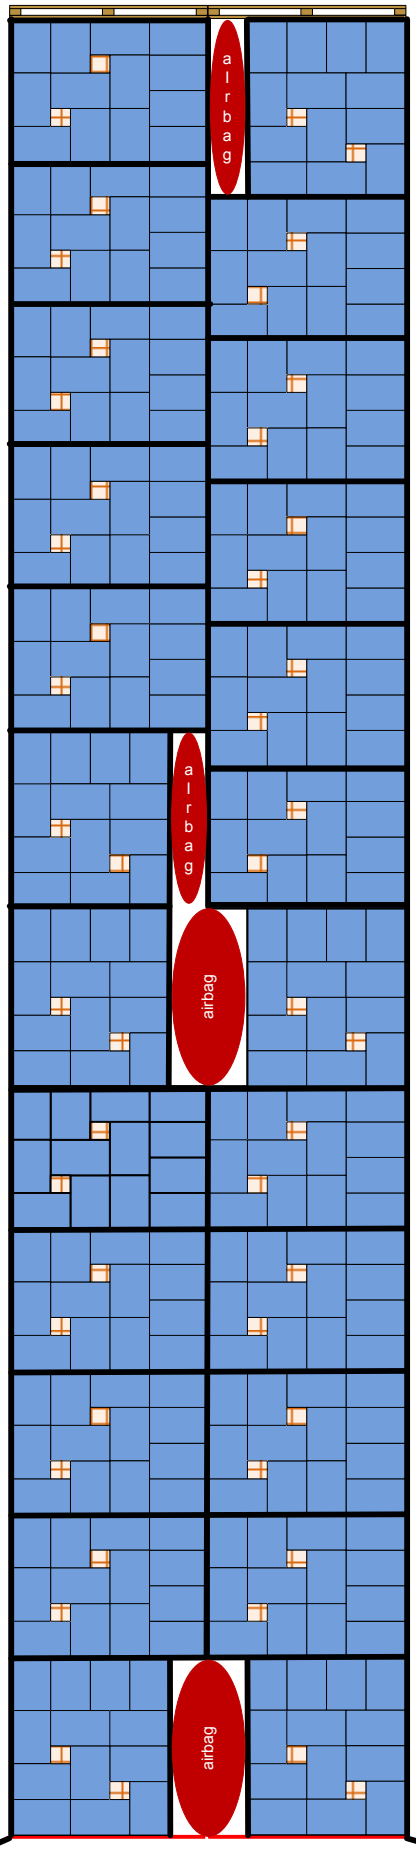

loading with

total **45 Japan pallets** 1150 x 900 mm, max. 570 kg each
(for Article RB 33431 + RB 38374 + RB 37936 ex AT)

For protection purposes each pallet is equipped by dispatch plant with
1 integrated carton interlayer (Art. 32502) and
1 integrated particle board (Art. 32345)

tie-down

4 pallets (heat-treated) have to be positioned at the front wall of container

The airbags (1000 x 1850 mm) have to be applied about 30 cm above loading platform



To protect goods against damage at the container doors 2 particle boards (2200 x 1150 mm) have to be placed adjacent to loaded goods and afterwards 2 styrofoam profiles have to be fixed between particle boards and container doors..

picture sealed (bolt seal)

Accessories for tie-down additionally provided by dispatch plant

Art. 15249 Japan pallet (heat-treated)	4x
Art. 32396 Airbag large (1000 x 1850 mm)	7x
Art. 32706 Airbag small (1000 x 1200 mm)	1x
Art. 32346 particle board large (2200 x 1150 mm)	2x
Art. 32402 styrofoam profile (1000 x 100 x 55 mm)	4x

upper level 21 pallets

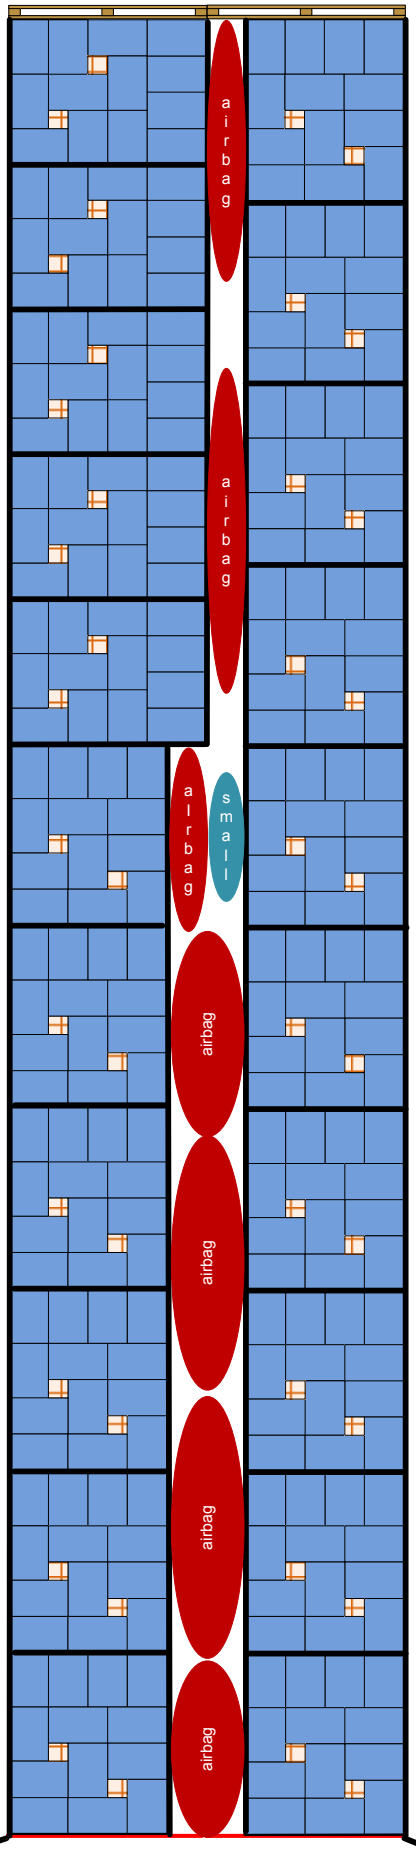

40f 45 Japan Pal